


T2 Specification

版本	日期	原因
V2.00	2015/08/07	创建文档

Hardware:

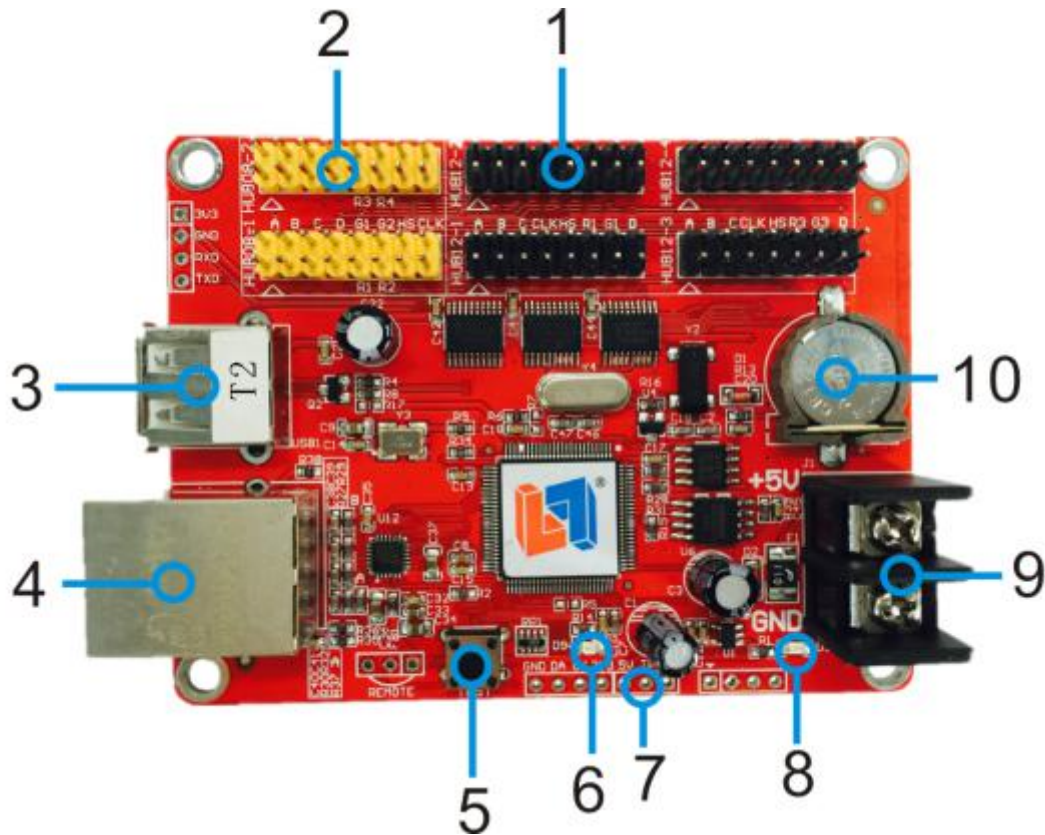

Number	Interface Name	Description
1	HUB12 Port	Connect HUB12 module
2	HUB08 Port	Connect HUB08 module
3	USB Port	USB Port
4	Ethernet port	Million ethernet interface
5	Multifunction button	Can support : 1.Test LED panel 2.Restore factory settings
6	Status indicator	Indicating working state
7	Sensor port	Connect TEMP sensor
8	5V Power indicator	Indicating power state
9	5V Power Port	Wide voltage input 3.5V-6V
10	RTC Button battery	RTC Power , Voltage 3V

Parameter:

Memory	2MByte
Adaptation	Single color , Double color
Pixels	Single:32K; Double:16K
Range	Single:2048*16 1024*32 ; Double:1024*16 512*32
Function	Multi area display/Multi language version
Program NO.	Support 128 program , Each program 16 zones
Area type	Text/Image/Animation/Time/Analog clock/Timer/Temperature/Temperature and humidity
Frame mode	Program Water frame/Area Water frame
Clock	Digital clock/Analog clock/Countup/Countdown
Communication	USB port and million ethernet interface
Display Port	2*HUB08 , 4*HUB12
Sensor	Temperature Sensor
Brightness	16 Level brightness , Automatically adjust the period of time
Remote	Support Timing Switch/Software Switch
Voltage	3.5V~6V
Max Power	<1W
Temperature	-40°C-85°C
Secondary Development	DLL

Software

LED Player 6.0

Size Chart:

